


		Formed & Layed													
	Description	Length	Width	Area m2	Cubic m3	Cost \$	Total	Type	Works Required	Side of Road	Power Lines	Tree Removal	Comments		
<u>2024/25</u>															
Forrest Street	Pemberton to Cubbine St	620	2.0	1240	124	650	80,600	Concrete	Replace Existing	South	South	Yes	Existing fotpath is only 1.2m wide and is in poor condition		
Mitchell Street	Togo to Spear & Hodgson to end	950	1.8	1710	171	650	111,150	Concrete	New	North	North & South	Yes	Existing 1.2m & 1.5m footpath between Hodgson St and Spear St on north side of road		
Hodgson Street	Hastie to Yilgarn	180	1.8	324	32.4	650	<u>21,060</u>	Concrete	New	East	West	Yes	Continuation of existing footpath		
							212,810								
<u>2025/26</u>															
Bedford Street	Togo to Hodgson	475	1.8	855	85.5	650	55,575	Concrete	New	North	North	Yes	Continuation of Existing footpath		
Baxter Road	Great Eastern Hwy to Lunday Ave	200	1.8	360	36	650	23,400	Concrete	New	Unknown		Possible	Possible issues on cnr of GEH with culvert & and with interactions at Mcintoish		
Lundy Street	Hospital to Carter Drive	250	1.8	450	45	650	29,250	Concrete	New	South	North	Yes	Continuation of existing footpath		
Kennedy Street	Mitchell to Margret	210	1.8	378	37.8	650	<u>24,570</u>	Concrete	New	East	West	Yes	Continuation of existing footpath		
							132,795								
<u>2026/27</u>															
Togo Street	Great Eastern Hwy to Yilgarn	600	1.8	1080	108	650	70,200	Concrete	New	East	East	Yes	New footpath		
Cubbine Street	Third to Watts	320	1.8	576	57.6	650	<u>37,440</u>	Concrete	New	West	East	Yes	Continuation of existing footpath		
							107,640								
<u>2027/28</u>															
Baxter Road	Lundy to railway line	360	1.8	648	64.8	650	42,120	Concrete	New	Either		Possible	This project is to be completed at same time as WSNF upgrade of these roads New footpath		
Olympic Avenue	Baxter to Cater Drive	470	1.8	846	84.6	650	54,990	Concrete	New	Either		Yes	New footpath		
Carter Drive	Olympic to Lundy	570	1.8	1026	102.6	650	<u>66,690</u>	Concrete	New	Either		Yes	New footpath		
							163,800								
<u>2028/29</u>															
Togo Street	Yilgarn to Watts	400	1.8	720	72	650	46,800	Concrete	New	East	East	Yes	This project may be moved to coincide with Watss St sub division New footpath		
Watts Street	Togo to Cubbine St	1120	1.8	2016	201.6	650	<u>131,040</u>	Concrete	New			Yes	New footpath. Some of this footpath may be gravel.		
							177,840								
<u>2029/30</u>															
Yilgarn Street	Togo to Pemberton	850	1.8	1530	153	650	<u>99,450</u>	Concrete	New	South	South	Yes	New footpath		
							99,450								
<u>2030/31</u>															
Spear Street	Great Eastern Hwy to Yilgarn	600	1.8	1080	108	650	70,200	Concrete	New	East	East	Yes	New footpath		
Hodgson Street	Yilgarn to Watts	400	1.8	720	72	650	<u>46,800</u>	Concrete	New	East	West	Yes	Continuation of existing footpath		
							117,000								
<u>2031/32</u>															
Donovan Street	Bedford to Mitchell	115	1.8	207	20.7	650	13,455	Concrete	New	West		Yes	Continuation of existing footpath		
Pemberton Street	Mitchell to Yilgarn	360	1.8	648	64.8	650	<u>42,120</u>	Concrete	New	East	East	Yes	Continuation of existing footpath		
							55,575								
<u>2032/33</u>															
Main St East	Carter Drive to last house	400	1.8	720	72	650	<u>46,800</u>	Concrete	New	North	North	Yes	New footpath		
							46,800								
							1,113,710								

-- Map Viewer Plus --

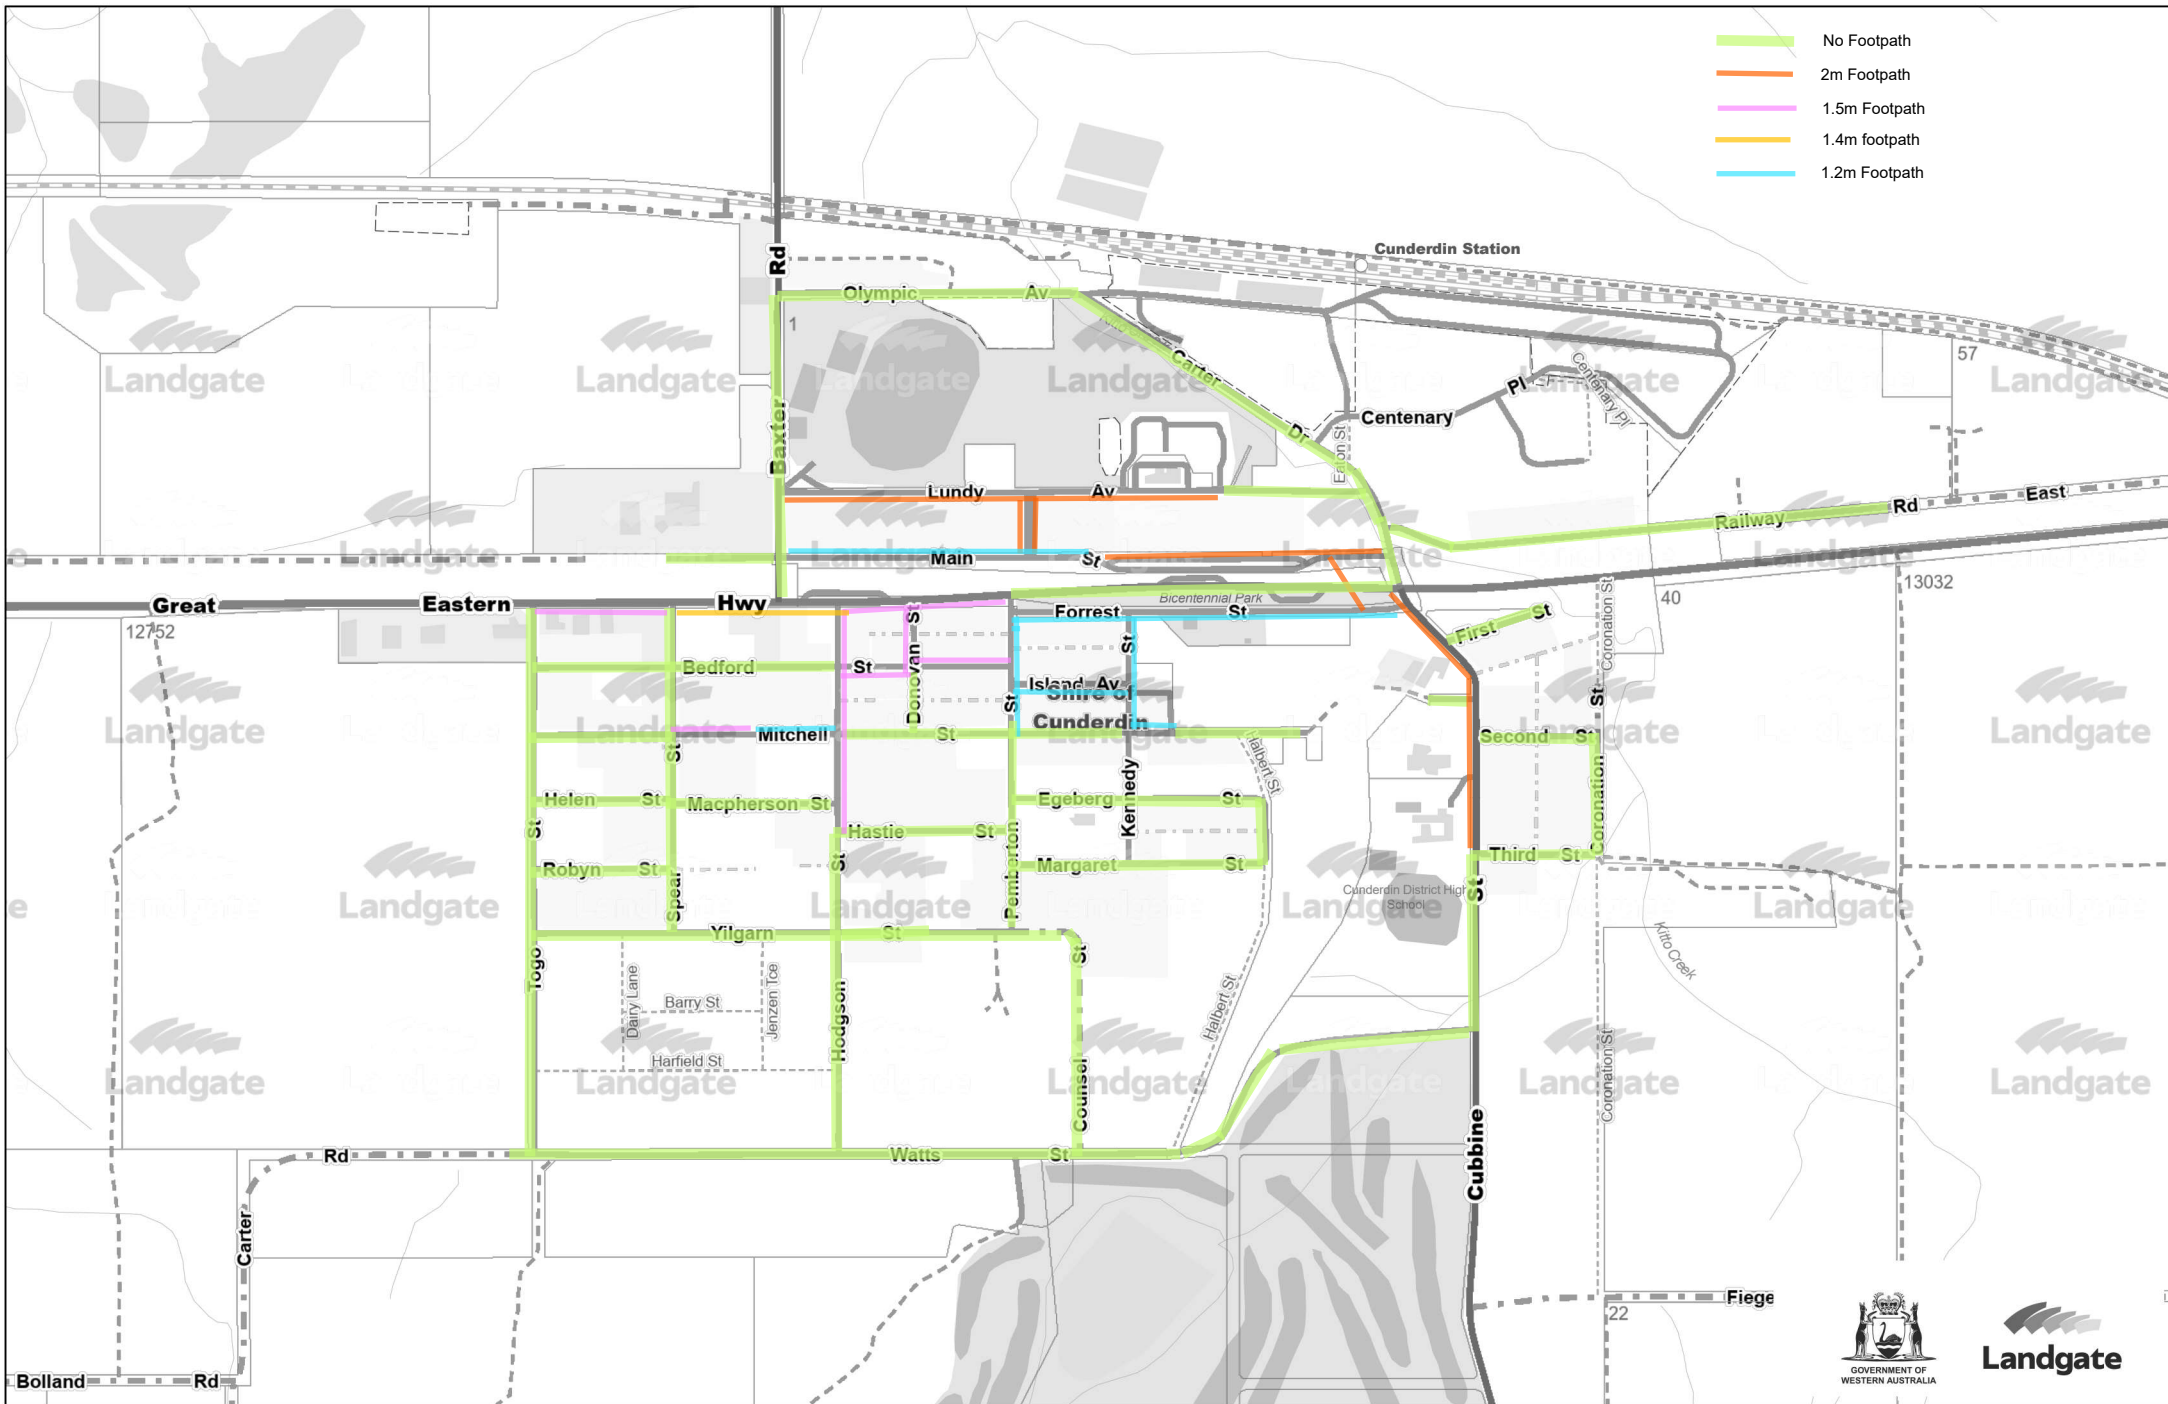


Author:

Created: 19 June 2024 from Map Viewer Plus <https://map-viewer-plus.app.landgate.wa.gov.au/index.html>

Landgate
GOVERNMENT OF WESTERN AUSTRALIA

Scale bar: 0, 0.15, 0.31, 0.46, 0.62 km

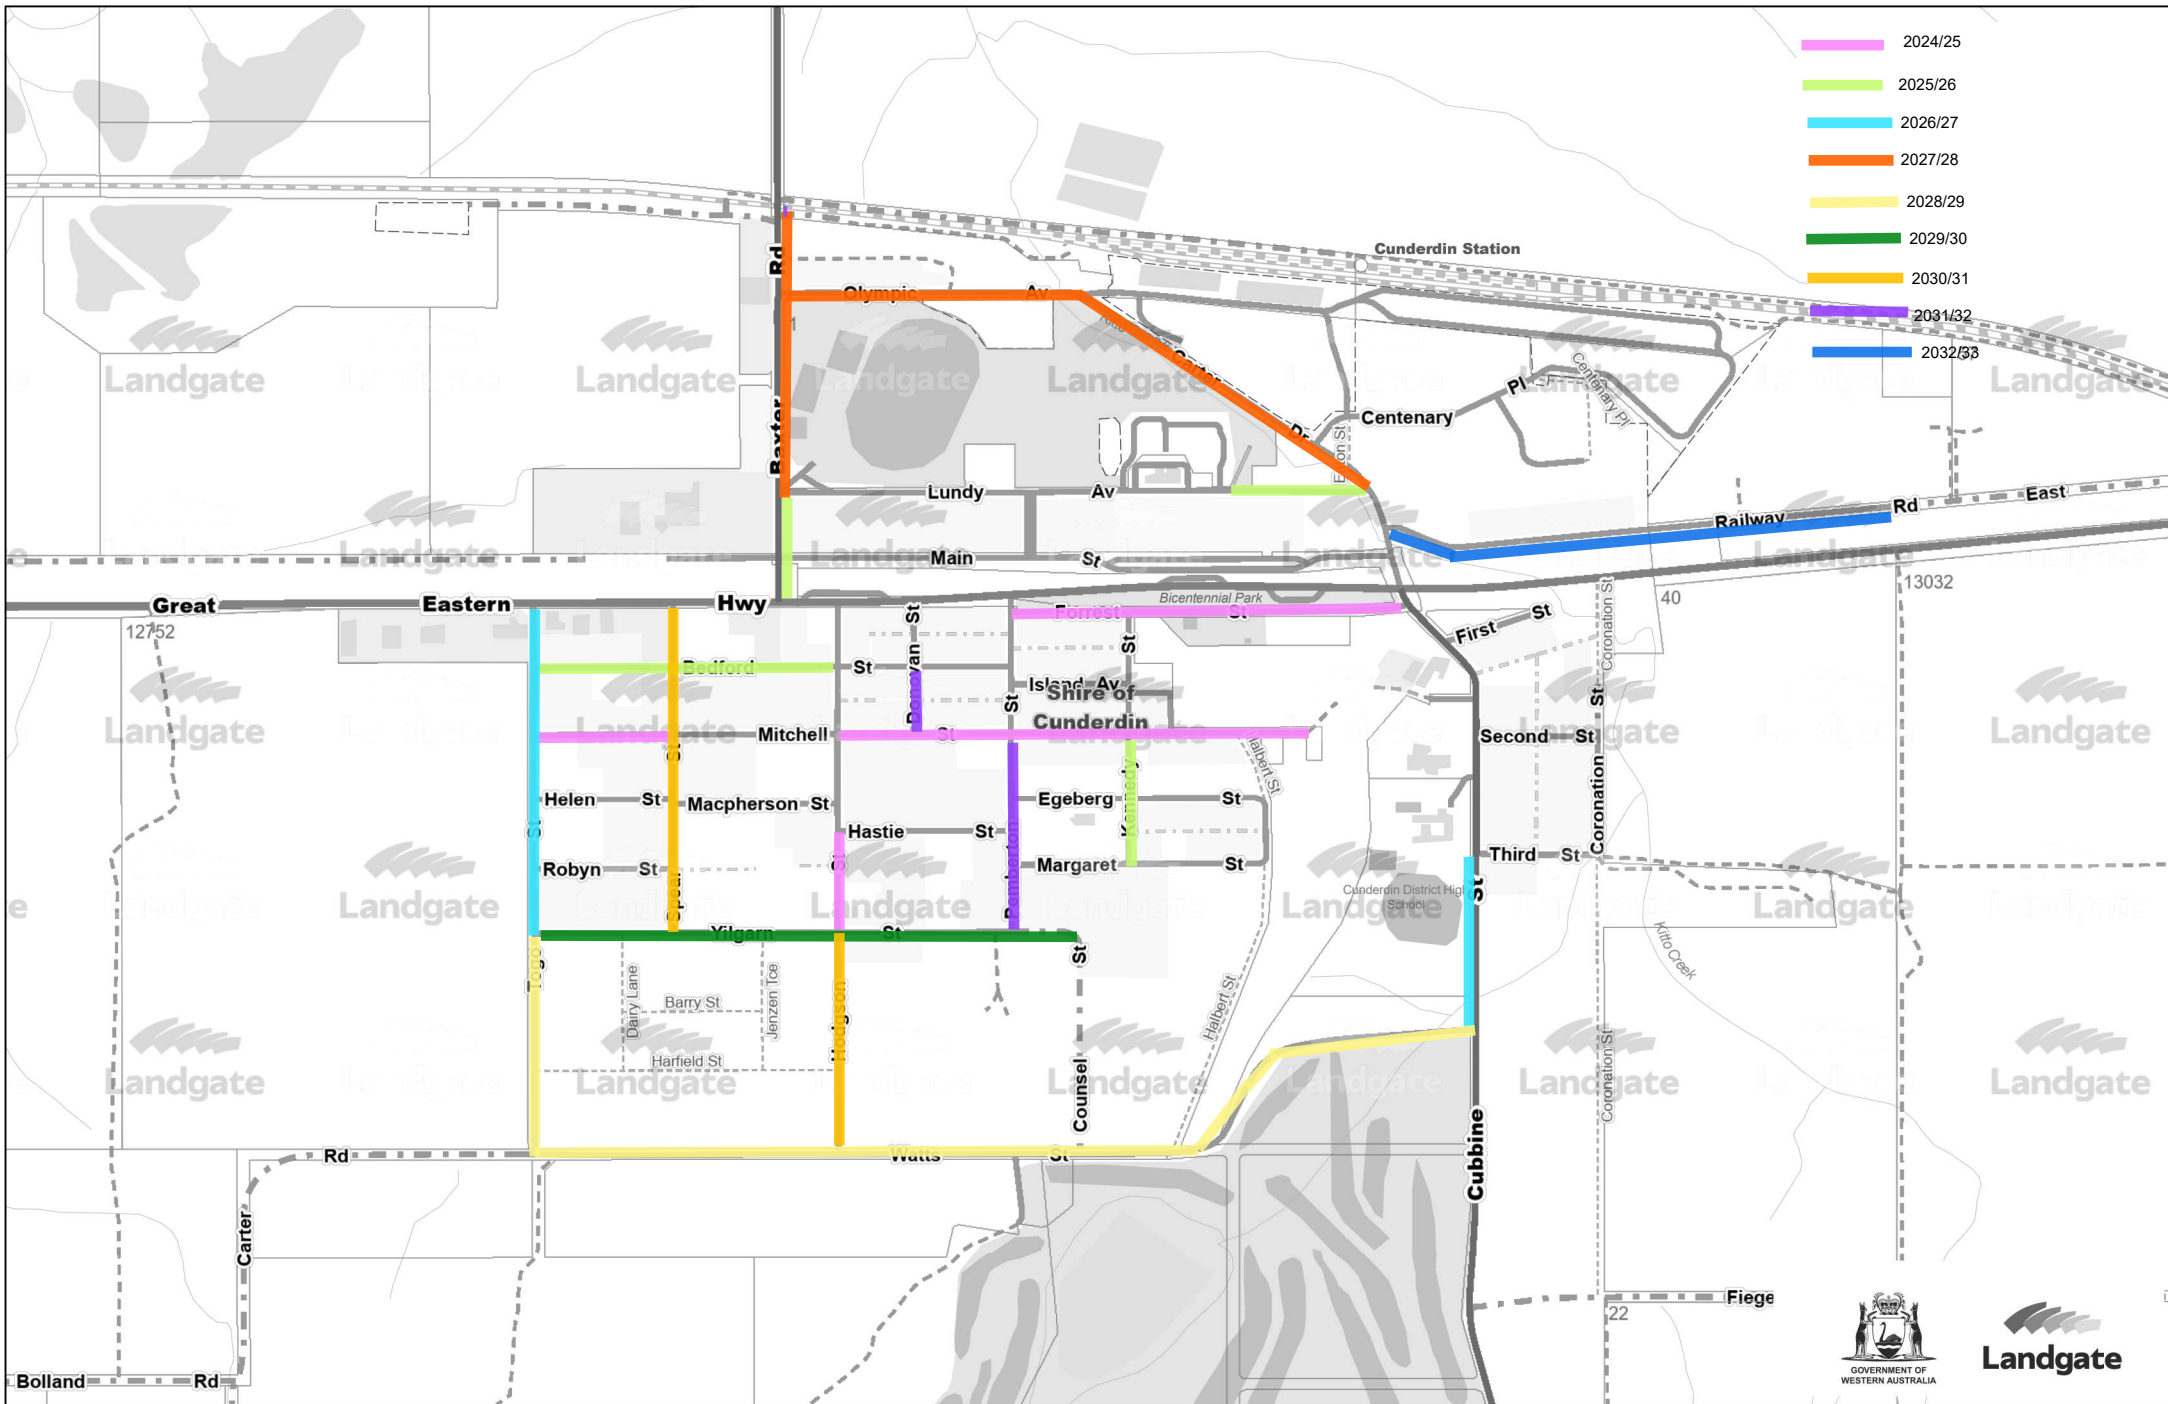

Author:

Created: 19 June 2024 from Map Viewer Plus <https://map-viewer-plus.app.landgate.wa.gov.au/index.html>

Landgate
GOVERNMENT OF WESTERN AUSTRALIA

1:4,514

0 0.15 0.31 0.46 0.62 km

